

**ARQUITRAIL** arises from the need to provide the lighting market a solution that integrates linear spaces in a subtle way.

This luminaire is the ideal solution for those seeking for a modern and minimalist solution.

The simplicity of its shape benefits any space, creating unique and appealing environments.

## DESIGN

ARQUITRAIL, with a discreet integration, is suitable for accent or marking lighting.

Its design allows recessed or surface mounting, being ideal for showing paths or highlighting unique architectural details.

ARQUITRAIL allows you to create continuous lines of light without interruption and with excellent uniformity, resulting in the perfect solution for small-sized spaces.

## ROBUSTNESS

ARQUITRAIL is a linear solution that can be used for indoor or outdoor illumination.

With a robust design, this device presents a high ingress protection (IP66) and mechanical impact protection (IK08), ensuring that photometric and mechanical performance is maintained over time.

## APPLICATION

- Retail
- Offices
- Schools
- Hospitals
- Museums & Monuments

## BENEFITS

- Continuous lines without light interruption
- Discreet integration in spaces
- High ingress protection
- Resistant materials
- Easy installation
- Low power consumption



# ARQUITRAIL

up to  
**50 000h**  
lifetime

IP66


IK08

ta  
35 °C

-20 °C  
+35 °C

CLASS  
III

## DIMENSIONS

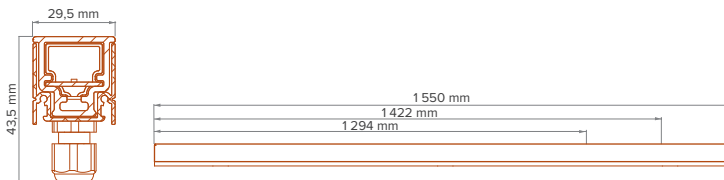

## PRODUCT MODELS

<b>Dimensions*</b>	1.294 - 1.550 mm
<b>Power Consumption</b>	6 - 18 W
<b>Luminous Flux @4000K<sup>(1)</sup></b>	310 - 1.080 lm

## TECHNICAL FEATURES

<b>Housing</b>	Extruded aluminium and stainless steel
<b>Diffuser</b>	Opaline polycarbonate
<b>Finishing</b>	Anodization
<b>Colour</b>	Natural anodized
<b>CCT</b>	4.000 K*
<b>Colour Rendering Index (CRI)</b>	≥ 72
<b>Ingress Protection</b>	IP66 (IEC - EN 60598)
<b>Mechanical Impact Protection</b>	IK08 (IEC - EN 62262)
<b>Nominal voltage</b>	24 Vdc to 48 Vdc (power supply AC/DC not included)
<b>Electrical class</b>	Class III
<b>LED L80 B10 lifetime</b>	Up to 50.000h <sup>(1)</sup>
<b>Flux regulation 1-10V</b>	Possible, depending on driver type
<b>Mounting</b>	Surface application on ceiling or wall
<b>Weight</b>	0,3 Kg

<sup>(1)</sup> The initial flux and power consumption of the luminaire are indicative values and valid to @tj=25°C. The real flux output of the luminaire depends on specific conditions, such as temperature and may vary with specific configurations. The values are subject to tolerances in technology.

\* Other options on request.

COMMERCIAL LIGHTING OUTDOOR SF

2019, ARQUILED, PROJECTOS DE ILUMINAÇÃO, SA  
All rights reserved.  
All trademarks are property of ARQUILED, PROJECTOS DE ILUMINAÇÃO, SA.  
Specifications subject to change without notice.

