

ARQUILED presents the urban luminaire **SEXTANS** - ideal for residential areas - squares, pedestrian or bike paths, blending in a natural way due to its characteristic lamp design shape and providing comfort and safety.

Highlighted by a stylish but discrete look, **SEXTANS** luminaire fits perfectly either in a classic or contemporary urban set up.

Due to a careful selection of materials, this urban luminaire assures an outstanding performance with a high protection degree during a long-life span.

DESIGN

The **SEXTANS** luminaire combines a timeless design with LED technology efficiency, making a perfect match between the environment where operates and the role it plays.

The available clear diffuser version is softer to the eyes due to high photometric efficiency and provides a significant reduction in the energy bill at the same time.

RELIABILITY

The **SEXTANS** luminaire is an outdoor light with a high resistance towards impact and vandalism by integrating an IP66 sealing level and an IK08 shock resistance level.

With a single, high impact, polycarbonate diffuser with anti-UV treatment - resistant to the sea air and corrosion - this unique luminaire was built to keep an outstanding long-life span.

APPLICATION

- Residential areas
- Squares, public parks and gardens
- Pedestrian and bike paths
- Parking lots

BENEFITS

- Perfect for classical and contemporary ambience
- Pre-cabled for easy installation
- Low energy consumption
- Easy maintenance
- Robustness
- Long-life span





SEXTANS

up to
122 lm/W
luminous efficiency

up to
80%
energy efficiency

ELECTRONIC BLOCK

Independent module
High performance driver
Integrated thermal protection




IP66

IK08

ta
40 °C

CLASS
II

DIMENSIONS

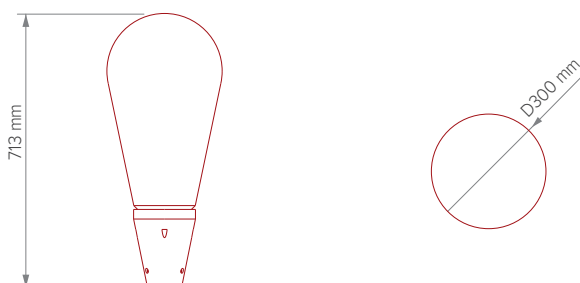

PRODUCT MODELS

Product Models	SEXTANS 10 20 30
Power Consumption ⁽¹⁾	7 - 29 W (depending on configuration)
Luminous Flux ⁽¹⁾	857 - 2.980 lm
Luminous Efficiency	Up to 122 lm/W

SPECIFICATIONS

Housing	Polycarbonate
Housing diffuser	Transparent polycarbonate
Product color	RAL 7016*
Correlated Color Temperature (CCT)	3.000 K / 4.000 K*
Lumen maintenance at 100 000h	> 95% ⁽²⁾
Color Rendering Index (CRI)	≥ 70
Ingress protection (IEC – EN 60598)	IP66
Mechanical impacts protection (IEC – EN 62262)	IK08
Nominal voltage	230 V / 50 - 60 Hz*
Surge overvoltage protection (EN 61000-4-5)	4 kV / 10 kV
Electrical class	Class II
Mounting	Vertical
Inside mounting diameter	Ø 60 mm

⁽¹⁾ The initial flux and power consumption of the luminaire are indicative values and valid for @tj=25°C. The real flux output of the luminaire depends on specific conditions, such as temperature and may vary with specific configurations. The values are subject to tolerances in technology.

⁽²⁾ In accordance with IES LM-80 - TM-21

* Other options available on request.

STREET
LIGHTING

URBAN VM

SEXTANS

DIFFUSER

Transparent polycarbonate




PHOTOMETRIC DATA


Medium Wide Beam I



Wide Beam I



Extra Wide Beam I



ECCOS

ECCOS single

Luminaire's integrated single control system that allows to define savings profiles according to predefined time intervals and luminous flux levels.

ECCOS street

Luminaire's integrated control system that commands the luminous flux through a micro-cut system.

2021, ARQUILED, PROJECTOS DE ILUMINAÇÃO, SA.
All rights reserved. All trademarks are acknowledged.
ECCOS brand is a trademark used under licence of Bright Science Ltd.
The images presented are for illustrative purposes and may differ from the final product.

SEXTANS Data subject to change. | EN_26022021.005

www.arquiled.com



STREET
LIGHTING

URBAN VM



SEXTANS
www.arquiled.com