

# ORIONT

STREET LIGHTING URBAN VM

Urban luminaire **ORIONT** from ARQUILED is ideal for parks, gardens and squares, pedestrian zones, cycle paths and residential areas, blending in with its surroundings and contributing to the aesthetics and safety of cities.

The remarkable visual comfort along with the energy efficiency and a robust design makes this luminaire suitable for new projects or redevelopment projects. And ORIONT's energy-saving potential, as well as its long-life span, turns this luminaire in an excellent choice for a quick return on investment.

## EFFICIENCY AND DESIGN

- Adaptable to historical and contemporary surrounding
- Various types of diffuser: transparent and translucent
- Aluminum or polycarbonate housing options
- Luminous efficiency: up to 123 lm/W
- Low energy consumption
- Dimming control options: integrated or external via NEMA or Zhaga
- Pre-wired for easy installation
- Robust and long-life span
- Compatible with a wide range of connectivity solutions for Smart Cities

## APPLICATION AREAS

- Residential areas and historical centers
- Squares, parks and gardens
- Pedestrian zones and byke paths
- Parking lots





## MULTIPLE OPTIONS



Die-cast aluminum housing  
Clear polycarbonate diffuser with metallic cap and axial electronic block  
(models 10, 20, 30 e 40)  
External connector available on all models with aluminum housing  
(optional)



Polycarbonate housing  
Opal polycarbonate diffuser with radial electronic block  
(models 50 e 70)  
Connectivity: embedded board available on all models with  
polycarbonate housing (optional)

### DIFFUSER

- High-impact polycarbonate diffuser with UV protection
- Opal polycarbonate with radial electronic block, available in all models
- Clear polycarbonate with axial electronic block, available in models 10, 20, 30 and 40

### HOUSING

- Die-cast aluminum housing
- Polycarbonate housing

### OPTICAL AND ELECTRONIC BLOCK

- Axial or radial optical block, with a high protection index in the power supply and mains connection compartment

### SMART READY

- Lighting control and dimming: ECCOS embedded
- External control and dimming (NEMA or Zhaga): ECCOS Controller



## PRODUCT MODELS

	ORIONT 10   20   30   40   50   70
Power consumption <sup>1</sup>	7 - 69 W (depending on configuration)
Luminous flux <sup>1</sup>	855 - 8,111 lm
Luminous efficiency	Up to 132 lm/W



Version with NEMA connector, on die-cast aluminum housing  
Also available for Zhaga

## SPECIFICATIONS

Diffuser and cover	Clear polycarbonate (models 10, 20, 30, 40) Clear polycarbonate with cap (models 10, 20, 30, 40) Opal polycarbonate (modelos 50, 70) Opal polycarbonate with cap (models 50, 70)
Housing	Die-cast aluminum: standard version and version with NEMA/ Zhaga connector Polycarbonate: standard version only
Product color <sup>2</sup>	Housing: RAL 7016
Correlated Color Temperature (CCT)	3000 K / 4000 K <sup>2</sup>
Lumen maintenance at 100,000h	> 95% <sup>3</sup>
Chromatic Restitution Index (CRI)	≥ 70 <sup>2</sup>
Ingress protection (IEC – EN 60598)	IP66
Mechanical impacts protection (IEC – EN 62262)	IK10 <sup>4</sup>
Nominal voltage	230 V / 50 Hz
Surge overvoltage protection (EN 61000-4-5)	4 kV / 10 kV
Electrical class	Class II
Driver <sup>5</sup>	ON-OFF / 0-10 V / DALI-2 / D4i
Connectivity (optional)	Board embedded 5-pin and 7-pin NEMA connector (ANSI C136.41) Zhaga connector
Smart Cities' solutions (optional)	<b>Integrated Management System:</b> ECCOS City <b>Lighting control and dimming systems:</b> ECCOS Single, ECCOS Street, ECCOS Embedded, and ECCOS Controller <b>Pedestrian traffic monitoring and counting system:</b> MYRIAD Counter
Mounting	Post-top
Inside mounting diameter	ø 60 mm <sup>2</sup>

<sup>1</sup> The initial flux, power and energy consumption of the luminaire are indicative values valid for an ambient temperature=25°C and measured at 230V. The actual flux emitted by the luminaire depends on some conditions, such as temperature, and may vary according to the model. The values indicated are subject to technological tolerances, within reasonable variations and the current state of the art.

<sup>2</sup> Other options available on request.

<sup>3</sup> In accordance with IES LM-80- TM21.

<sup>4</sup> IK08 for models with NEMA/Zhaga connector.


<sup>5</sup> Specifications vary according to model and configuration.




## DIMENSIONS

### DIE-CAST ALUMINUM HOUSING



Standard

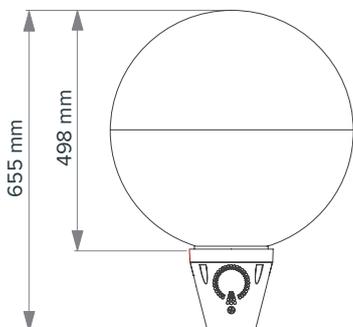







With NEMA / Zhaga connector

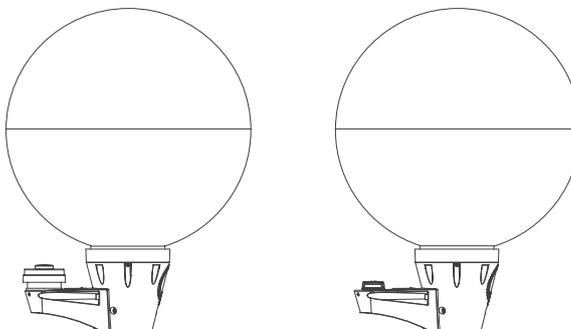

### POLYCARBONATE HOUSING

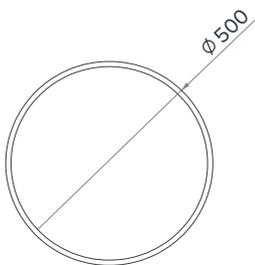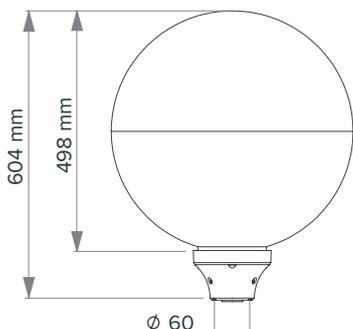

## OPTICAL DATA<sup>2</sup>

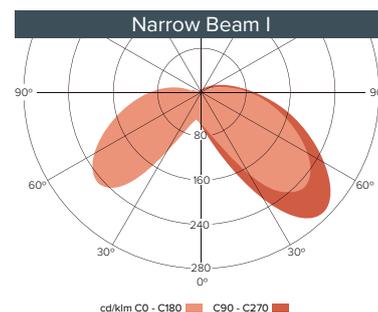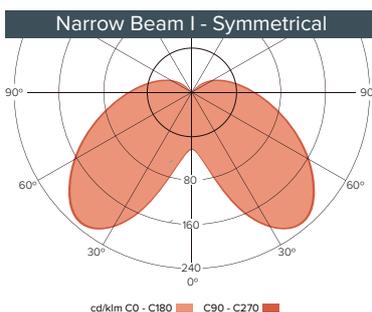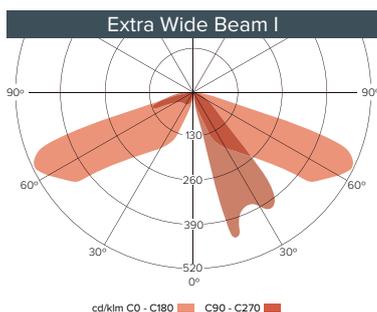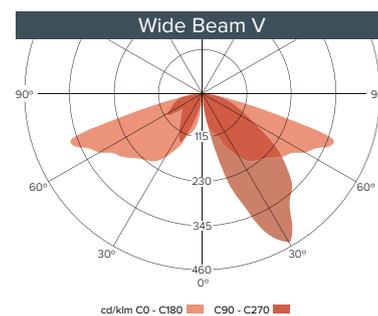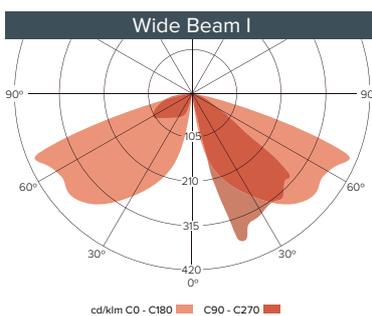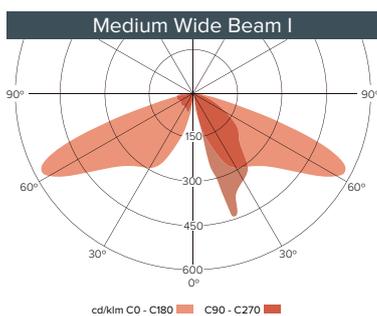

<sup>2</sup> Other options available on request.



## SMART CITIES | IoT CONNECTIVITY SOLUTIONS

### LIGHTING CONTROL AND DIMMING

ECCOS systems are a set of lighting control and light variable intensity (dimming) that offer an adaptable and scalable wide range for each street lighting project needs. From the simplest solution for controlling and scale a luminaire flux intensity, to the most sophisticated remote management systems for street lighting.

Each system is designed accordingly with each municipalities' needs and can go through solutions integrated in the luminaires to external devices (Plug n'Play type), easily coupled to the luminaires.

### INTERNAL STREET LIGHT CONTROLLERS

#### **E C C O S** embedded

Internal communications module to control and dimming light through a management platform.

#### **E C C O S** street

Internal dimming device, per group of luminaires, for up to 16 dimming profiles, with a maximum of 10 circuits, that operates the command and control the light intensity of electric micro cuts.

#### **E C C O S** single

Individual and autonomous control system integrated in the luminaire to set up to 16 factory-defined or customer-defined operating modes in pre-set time slots, without the need for any additional control.

### EXTERNAL STREET LIGHT CONTROLLERS

#### **E C C O S** controller

External monitoring module (in NEMA socket) to control and dimming light, through a management platform.

### MONITORING AND ACCOUNTING OF FOOT TRAFFIC

#### **MYRIAD** Counter

Non-intrusive monitoring system of movement flows, duration, and distance of pedestrian traffic operated by a WiFi® range of sensors. The system collects the data and allows to make data analysis almost instantaneously.

The sensor network can be installed anywhere, with electrical power and communications or housingd on the street lighting infrastructure - coupled to luminaires with connectivity.

### MANAGEMENT SYSTEMS

#### **E C C O S** city

Management system, bidirectional and geolocated for street lighting, in a SaaS mode, integrated in the luminaire.

Housingd on various communication technologies such as GSM / M2M, LoRaWAN® and NB-IoT, among others, it allows to remotely manage the luminaires via web application, with automation tasks and alerts.

The management platform allows the integration with other IoT systems.

2024, ARQUILED, PROJETOS DE ILUMINAÇÃO, SA.  
All rights reserved. All trademarks are acknowledged.  
ECCOS and MYRIAD brands are a trademark user under licence of Bright Science Ltd.  
LoRaWAN® is a trademark used under license from LoRa Alliance®.  
DALI (Digital Addressable Lighting Interface) is a registered trademark of DiiA (Digital Illumination Interface Alliance).  
Specifications valid except for omission or typographical error, subject to change without notice.  
The images presented are for illustrative purposes and may differ from the final product.